

Fast Building Electric Windlass Series Commercial Model

Model	Cable rated pull (kg)	Cable rated speed (m/min)	Wire rope (Φmm)	Wire length (m)	Drum(mm) Dia(Φ)	Motor Power (kw)	Weight (kg) Without rope	With rope
JKC0.5	500	22	7.7	100	175	4.2	139	150
JKC1	1000	22	9.3	160	218	5.5	179	200
JKC1.5	1500	22	11	200	255	7.5	316	350
JKC2	2000	22	12.5	200	275	11	456	500
JKC3	3000	16	15.5	200	330	11	467	550

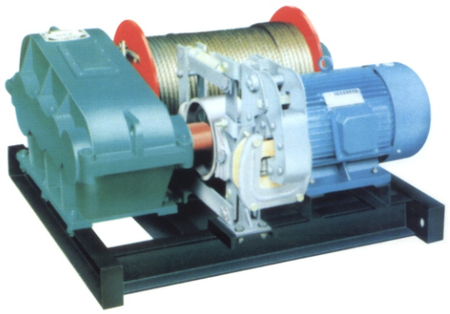

JK, JM 0.5T-3T

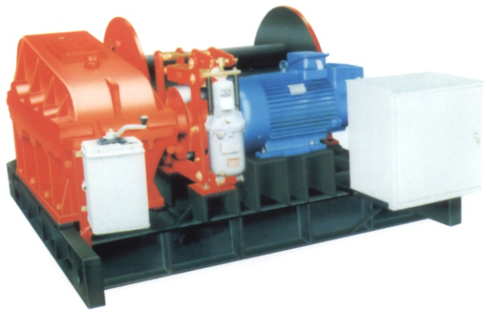

JK, JM 5T-30T

Slow Building Electric Windlass Series Commercial Model

Model	Cable rated pull (kg)	Cable rated speed (m/min)	Wire rope (Φmm)	Wire length (m)	Drum(mm) Dia(Φ)	Motor Power (kw)	Weight (kg) Without rope	With rope
JMC0.5	500	16	7.7	100	175	4.2	129.5	150
JMC1	1000	16	9.3	160	218	5.5	170	200
JMC1.5	1500	16	11	200	255	5.5	308.1	350
JMC2	2000	16	12.5	200	275	7.5	446	460
JMC3	3000	16	15.5	200	315	11	517	550
JMC5	5000	9	19.5	250	400	11	1280	1437
JMC8	8000	10	26	300	475	15	2850	3201
JMC10	10000	9	30	300	515	22	3200	3667
JMC16	16000	9	36.5	400	717	30	5200	6120
JMC20	20000	10	39	450	950	45	7500	8659
JMC30	30000	10	47.5	450	1100	55	9200	10916


Fast Building Electric Windlass Series

Model	Cable rated pull (kg)	Cable rated speed (m/min)	Wire rope (Φmm)	Reduction box Type	Transmission ratio	Drum(mm) Dia(Φ)	Length
Jk1	1000	34	9.3	JZQ350	31.5	190	360
Jk3	3000	35	17	JZQ500	23.34	270	570
Jk5	5000	29	22	JZQ650	40.17	400	840
Jk8	8000	20	26	JZQ650	23.34	500	900
Jk10	10000	19	30	JZQ750	23.34	550	1000

Model	Wire length (m)	Type	Motor Power (kw)	Rotate speed (r/min)	Arrester	Size (Cm)	Weight (kg) Without rope	With rope
Jk1	110	Y132M-4	7.5	1440	TJ2-200	102X90X60	460	495
Jk3	200	YZR225M-8	22	715	TJ2-300	156X137X90	1000	1205
Jk5	200	YZR250M1-8	30	720	TJ2-300	220X180X94	2700	3320
Jk8	300	YZR250M1-6	37	960	YWZ-300	240X180X110	4000	4740
Jk10	300	YZR250M2-6	45	960	YWZ-400	250X190X120	5000	6460



JK1-JK10



JM2-JM30

Slow Building Electric Windlass Series

Model	Cable rated pull (kg)	Cable rated speed (m/min)	Wire rope (Φmm)	Reduction box Type	Transmission ratio	Drum(mm) Dia(Φ)	Length
JM2	2000	12	15.53	JZQ350	23.34	260	480
JM3	3000	10	17	JZQ350	31.50	310	510
JM5	5000	11	21.50	JZQ400	23.34	400	730
JM8	8000	10	26	JZQ500	31.50	500	900
JM10	10000	9	30	JZQ650	40.17	550	1000
JM12	12000	9	32	JZQ650	40.17	650	1000
JM16	16000	6.6	36.5	JZQ750	31.50	750	1830
JM20	20000	7.7	39	JZQ750	31.50	750	1830
JM25	25000	8.5	42	JZQ750	31.50	850	1925
JM30	30000	8.5	48	JZQ850	23.34	960	1960

Model	Wire length (m)	Type	Motor Power (Kw)	Rotate speed (r/min)	Arrester	Size (cm)	Weight (kg) Without rope	With rope
JM2	150	Y160M-6	7.5	970	TJ2-200	115X100X60	630	760
JM3	180	Y160M-6	7.5	970	TJ2-200	138X106X65	680	870
JM5	250	YZR180L-8	11	685	TJ2-300	185X135X90	1400	1890
JM8	250	YZR225M-8	22	715	YWZ-300	205X275X105	3000	3740
JM10	300	YZR250M1-8	30	720	YWZ-300	220X180X110	4000	5450
JM12	300	YZR250M2-8	37	725	YWZ-300	250X190X120	5500	7350
JM16	450	Y2ZR280S-8	45	717	YWZ-400	390X300X245	7500	12360
JM20	500	YZR250M2-6	45	965	YWZ-400	400X300X170	8500	12300
JM25	500	YZR280S-6	55	969	YWZ-400	412X300X200	9500	13920
JM30	500	YZR280M-6	75	969	YWZ-400	450X300X250	11000	17200